

SOLVER.

PRODUCT CARD

Short name

AKCW-EDL-(150)


Full name

Vertical closure clip - inox, lower

BASE DATA


Product group	Accessories
Application	• terrace tiles • raised deck terraces • terrace pedestals
Code	110.065021

EAN



TECHNICAL DATA

Minimum height	0.72 mm
Maximum height	0.72 mm
Total dimension - length	64 mm
Total dimension - width	75 mm
Total product dimensions - height	24 mm
Head diameter (top plate) Ø	0 mm (0 cm2)
Base diameter	Ø 0 mm (0 cm2)
Weight	~0.03 kg
Wytrzymałość na obciążenia do	0 kg

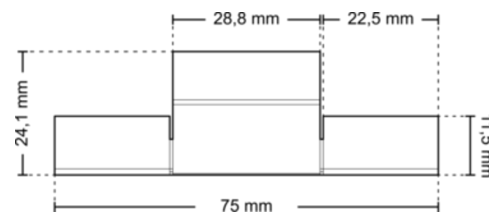

SOLVER.

Solver SP. Z O.O.
www.solver-systems.pl

phone: +48 58 585 97 37
email: sales@solver-systems.com

Wenus 73A,
80-299 Gdańsk, Poland




Fire resistance	E
Temperature range	od -20°C do 65°C
Color	silver
Mandatory warranty	Limited 10-year residential and commercial warranty
Country of origin	Poland
Material name	Stainless steel
Percentage of recycled material	0 %
Type of waste	• non-hazardous waste - recyclable
Project type	• exterior use

What finishing materials can be used

- concrete paver
- stone pavers
- ceramic tile

Consists of

Klips dolny EDL

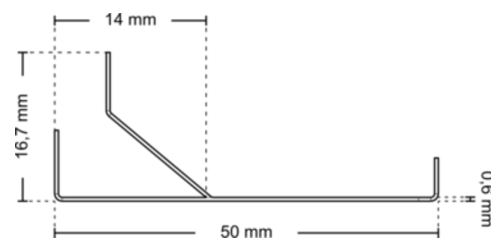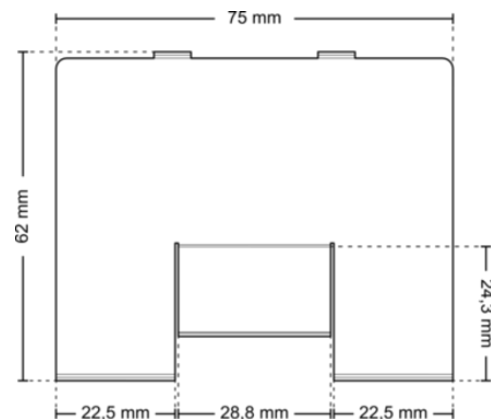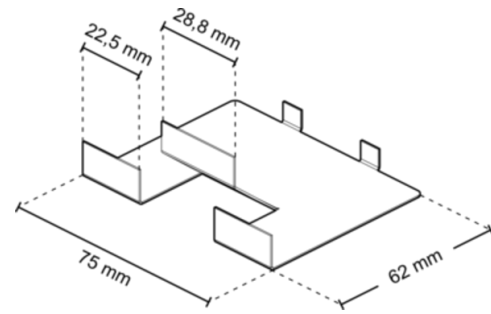

CERTIFICATES

Product certified by the Building Research Institute.
NATIONAL TECHNICAL ASSESSMENT ITB-KOT-2022-2174



LOGISTICS INFORMATION

Package	Quantity Packaging Value	Package weight	Empty package weight	Palett	Number of packages on a pallet	Number of pieces on a pallet	Pallet weight	Empty pallet weight
---------	--------------------------	----------------	----------------------	--------	--------------------------------	------------------------------	---------------	---------------------

Package	Quantity Packaging Value	Package weight	Empty package weight	Palett	Number of packages on a pallet	Number of pieces on a pallet	Pallet weight	Empty pallet weight
BOX 300x250x200	150	4 kg	0.24 kg	WOODEN PALLET 120x100x220	160	24000	704 kg	18 kg

Characteristic features

Features of the accessory:

1. Made of stainless steel
2. Used for mounting vertical pavers on terrace edges
3. Invisible installation
4. Requires notching the paver edge
5. Used to create a step
6. Mounted to the pedestal head

Application

Application of raised deck terraces:

The raised deck terrace system finds wide application in modern residential, commercial, and public utility construction. This solution is intended for creating:

1. terraces, balconies, and loggias
2. usable roofs and green roofs
3. recreational areas around buildings
4. pedestrian walkways, decks, and squares
5. spaces above technical installations requiring easy service access.

The system enables quick installation without the use of mortars and adhesives, ensuring free water drainage and ventilation under the entire terrace surface. Thanks to adjustable pedestals and/or joist construction, it allows for leveling slopes and height differences in the substrate.

Raised deck terraces are a particularly recommended solution where the following are important:

1. durability and resistance to weather conditions
2. aesthetic appearance and even surface
3. easy access to the insulation layer and installations
4. possibility of quick modernization or surface replacement

For use on paver terraces - creates a vertical edge of the terrace masking the space under the terrace.

Advantages

Advantages of raised deck terraces:

1. Height and level adjustment – possibility of precise leveling of the surface without the need for screeds
2. Effective drainage – gaps in the terrace drain water to the space under the terrace
3. Easy maintenance – access to installations and substrate without dismantling the entire structure
4. Easy maintenance – access to installations and substrate without dismantling the entire structure
5. Thermal and acoustic insulation – the air layer under the pavers improves user comfort
6. Quick installation and dismantling – possibility of reusing elements when changing the arrangement
7. Durability – resistance to weather conditions and usage loads

Advantages of the accessory:

1. Fascia clips are made of stainless steel and allow for the creation of an invisible vertical edge of the terrace with pavers that masks the space between the pedestals and the substrate

Installation recommendations

A raised deck terrace does not require permanent anchoring to the substrate. Free water drainage and ventilation must be ensured under the entire surface of the terrace. The substrate must be level, stable, and load-bearing. A slope of at least 1.5–2% towards the drainage must be provided. In the case of higher loads, densify the support grid. Level the terrace height by adjusting the pedestals. At building expansion joints, maintain a gap and seal

it with flexible elements. Pedestals cannot be stacked on top of each other - meaning the base of the upper pedestal cannot be placed on the top cap of the lower pedestal. The holes in the base are only for stacking pedestals during packaging.

Clips for mounting fascia boards require cutting the edge of the slab with a disc. Expansion clips are made of thin sheet metal - beware of sharp edges. Follow the installation instructions.

Tools

- Measure - Spirit level - String line or cross line laser - Pencil or construction marker - Mason's rule - Rubber mallet - Work gloves - Safety glasses - Hearing protection - Dust mask - Metal saw blade or jigsaw with metal cutting blade for trimming elements

Protective gloves.

Recommendations for use

The raised deck terrace is intended for use in accordance with its purpose – as a recreational surface. Do not point-load the pavers (e.g., by placing very heavy objects on a small area). Avoid mechanical impacts that could damage the pavers or the support structure. The terrace surface should be regularly swept, and leaves, sand, and debris that may accumulate in the joints should be removed. At least once a year, check the stability of the pavers and pedestals. After winter or heavy rainfall, check the drainage system for blockages. If looseness or damage is found – perform adjustment or replacement of the elements. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. In the case of a slippery surface, use anti-slip mats or additional protective coatings, e.g., around the pool.

Do not hit the vertical bottom fascia board of the terrace to avoid damage.