

PRODUCT CARD

Short name

AKCT-PIN10-(800)


Full name

SBR Interlocking pin - diameter 10 mm

BASE DATA



Product group	Terrace accessories
Application	• rubber sbr tiles
Code	301.050221

EAN




TECHNICAL DATA

Minimum height	0 mm
Maximum height	0 mm
Total dimension - length	9 mm
Total dimension - width	9 mm
Total product dimensions - height	63 mm
Head diameter (top plate) Ø	0 mm (0 cm2)
Base diameter	Ø 0 mm (0 cm2)
Weight	~0 kg
Wytrzymałość na obciążenia do	0 kg
Fire resistance	E

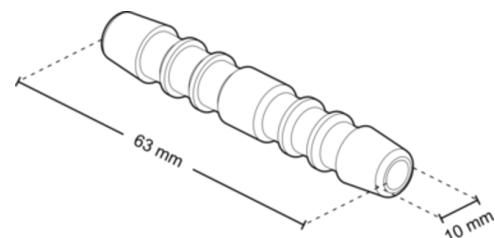

Temperature range	od -20°C do 65°C
Color	black
Mandatory warranty	Limited 10-year residential and commercial warranty
Country of origin	Poland
Material name	Polypropylene - black regrind
Percentage of recycled material	100 %
Type of waste	• non-hazardous waste - recyclable
Project type	• exterior use
What finishing materials can be used	
• rubber_sbr_tiles	

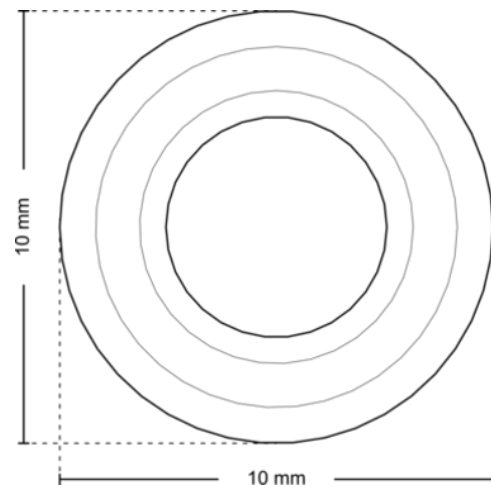

Consists of
SBR Pad 8 mm

CERTIFICATES

Product certified by the Building Research Institute.
NATIONAL TECHNICAL ASSESSMENT ITB-KOT-2022-2174



LOGISTICS INFORMATION

Package	Quantity Packaging Value	Package weight	Empty package weight	Palett	Number of packages on a pallet	Number of pieces on a pallet	Pallet weight	Empty pallet weight
STRING BAG 400X300	800	2 kg	0.001 kg	-	-	-	- kg	- kg

Characteristic features

Product features:

1. Creates a durable connection of SBR rubber pads
2. Pin diameter 10 mm

Application

Used for connecting SBR rubber mats and pads

Advantages

Product advantages:

1. Perfectly connects rubber pavers
2. Prevents paver deformation
3. Prevents paver spreading

Installation recommendations

Insert the dowel into the hole of the rubber pad using a rubber mallet. Slide the next paver by inserting it into the protruding dowels.

Tools

Rubber mallet.

Recommendations for use

The rubber pavers must be secured against spreading.