

## PRODUCT CARD

Short name

**PAD-015-L5-(300)**

Full name

15 mm fixed height pavers support pad with built in 3 mm and individual gap spacers 5 mm



### BASE DATA

**Product group** Paver supports

**Application** • terrace tiles

**Code** 101.040211

**EAN**

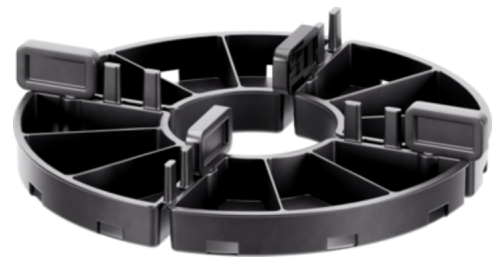

### TECHNICAL DATA

**Minimum height** 15 mm

**Maximum height** 15 mm

**Regulation type** gradual

**Total dimension - length** 146 mm

**Total dimension - width** 146 mm


**Total product dimensions - height** 27 mm

**Head diameter (top plate)** Ø 140 mm (130 cm<sup>2</sup>)

**Base diameter** Ø 140 mm (130 cm<sup>2</sup>)

**Weight** ~0.05 kg

**Wytrzymałość na** 1000 kg (10kN)

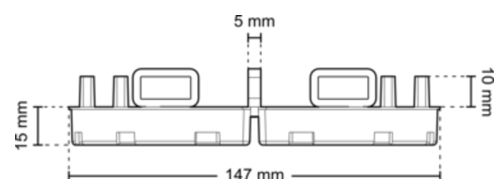

## obciążenia do

|                                        |                                                     |
|----------------------------------------|-----------------------------------------------------|
| <b>Fire resistance</b>                 | E                                                   |
| <b>Temperature range</b>               | od -20°C do 65°C                                    |
| <b>Color</b>                           | black                                               |
| <b>Mandatory warranty</b>              | Limited 10-year residential and commercial warranty |
| <b>Country of origin</b>               | Poland                                              |
| <b>Material name</b>                   | Polypropylene - black regrind                       |
| <b>Percentage of recycled material</b> | 100 %                                               |
| <b>Type of waste</b>                   | • non-hazardous waste - recyclable                  |
| <b>Project type</b>                    | • exterior use                                      |

## What finishing materials can be used



- stone pavers
- concrete paver
- ceramic tile

## Consists of

Support pad 15 mm , Individual gap spacer for tiles 5 mm

## CERTIFICATES

Product certified by the Building Research Institute.  
NATIONAL TECHNICAL ASSESSMENT ITB-KOT-2022-2174

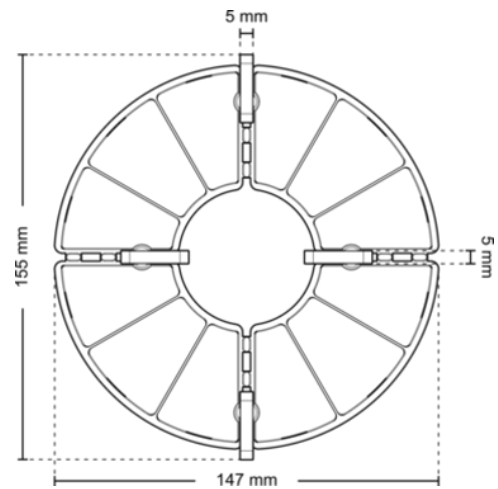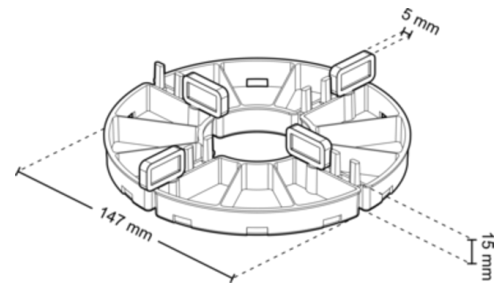

## LOGISTICS INFORMATION

| Package         | Quantity Packaging Value | Package weight | Empty package weight | Palett                       | Number of packages on a pallet | Number of pieces on a pallet | Pallet weight | Empty pallet weight |
|-----------------|--------------------------|----------------|----------------------|------------------------------|--------------------------------|------------------------------|---------------|---------------------|
| BOX 600x500x400 | 300                      | 15 kg          | 1.452 kg             | WOODEN PALLET<br>120x100x220 | 20                             | 6000                         | 329 kg        | 18 kg               |

## Characteristic features

Characteristics of the PAD series

1. Fixed height
2. Built-in 3 mm tile spacers
3. Modular construction allowing for easy cutting/snapping

Product features:

1. Features additional 5 mm spacers for pavers
2. For installing pavers in a raised deck system, without height adjustment
3. Stackable to achieve greater heights

## Application

Application of raised deck terraces:

The raised deck terrace system finds wide application in modern residential, commercial, and public utility construction. This solution is intended for creating:

1. terraces, balconies, and loggias
2. usable roofs and green roofs
3. recreational areas around buildings
4. pedestrian walkways, decks, and squares
5. spaces above technical installations requiring easy service access.

The system enables quick installation without the use of mortars and adhesives, ensuring free water drainage and ventilation under the entire terrace surface. Thanks to adjustable pedestals and/or joist construction, it allows for leveling slopes and height differences in the substrate.

Raised deck terraces are a particularly recommended solution where the following are important:

1. durability and resistance to weather conditions
2. aesthetic appearance and even surface
3. easy access to the insulation layer and installations
4. possibility of quick modernization or surface replacement

For laying terrace pavers without fluid height adjustment in a ventilated system and on a dry-set bedding course

Ideal for creating external terraces with ceramic pavers or tiles, intended for pedestrian traffic only.

For use in projects such as:

Roof terraces

Balconies

Loggias

Swimming pools

## Advantages

Advantages of raised deck terraces:

1. Height and level adjustment – possibility of precise leveling of the surface without the need for screeds
2. Effective drainage – gaps in the terrace drain water to the space under the terrace
3. Easy maintenance – access to installations and substrate without dismantling the entire structure
4. Easy maintenance – access to installations and substrate without dismantling the entire structure

5. Thermal and acoustic insulation – the air layer under the pavers improves user comfort
6. Quick installation and dismantling – possibility of reusing elements when changing the arrangement
7. Durability – resistance to weather conditions and usage loads

Product advantages:

1. Lightweight yet durable modular construction
2. Easy division into halves and quarters
3. Can be combined with 10mm height (PAD-010) to achieve the desired height.

## Installation recommendations

A raised deck terrace does not require permanent anchoring to the substrate. Free water drainage and ventilation must be ensured under the entire surface of the terrace. The substrate must be level, stable, and load-bearing. A slope of at least 1.5–2% towards the drainage must be provided. In the case of higher loads, densify the support grid. Level the terrace height by adjusting the pedestals. At building expansion joints, maintain a gap and seal it with flexible elements. Pedestals cannot be stacked on top of each other - meaning the base of the upper pedestal cannot be placed on the top cap of the lower pedestal. The holes in the base are only for stacking pedestals during packaging.

Recommendations for terraces with pavers: Set pedestals according to paver dimensions – standard spacing 40–60 cm, at corners - according to paver manufacturer's recommendations. Lay pavers starting from a corner, resting each on four pedestals. Maintain 3 or 5 mm expansion joints between pavers. Check level and stability of each paver, adjust pedestal settings as needed. The terrace should have edge restraint around its perimeter to prevent pavers from shifting. If edge restraint cannot be installed, secure the last row of pedestals and pavers against displacement using anchors or adhesive.

Before starting the installation, carefully analyze the technical documentation and other guidelines, including those related to the installation of floor slabs. Particular attention should be paid to the indicated support points for these slabs. Always follow the slab manufacturer's recommendations to ensure the products are suitable for installation in a raised deck system and to determine the number of support pads/pedestals per 1 m<sup>2</sup>. Qualification of "SELF-SUPPORTING" slabs in classes T7 and T11 according to standard EN 1339:2004-02 is recommended. Support pads can be stacked. We recommend a maximum stack consisting of 3 support pads. Minor unevenness resulting from differences in slab thickness should be leveled using AKCW-SH145. When placing support pads along a wall, they should be cut in half, and into quarters in corners.

## Tools

- Measure - Spirit level - String line or cross line laser - Pencil or construction marker - Mason's rule - Rubber mallet - Work gloves - Safety glasses - Hearing protection - Dust mask - Metal saw blade or jigsaw with metal cutting blade for trimming elements

## Recommendations for use

The raised deck terrace is intended for use in accordance with its purpose – as a recreational surface. Do not point-load the pavers (e.g., by placing very heavy objects on a small area). Avoid mechanical impacts that could damage the pavers or the support structure. The terrace surface should be regularly swept, and leaves, sand, and debris that may accumulate in the joints should be removed. At least once a year, check the stability of the pavers and pedestals. After winter or heavy rainfall, check the drainage system for blockages. If looseness or damage is found – perform adjustment or replacement of the elements. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. In the case of a slippery surface, use anti-slip mats or additional protective coatings, e.g., around the pool.

1. Maintenance Cleaning: Regularly sweep and remove debris (leaves, sand). Wet cleaning: Rinse with water under low pressure. Use mild detergents for ceramics. Joints: Monitor and replenish sand in the gaps if necessary to ensure surface stability. 2. Usage Garden furniture: Use pads under furniture legs. Move them carefully to avoid scratching the surface. Snow removal: Use a shovel with a plastic tip. Avoid road salt and other aggressive chemicals. 3. Inspection Check that the slope functions correctly and water drains freely. If pavers become unstable, lift them and reposition using support pads.