




40–200 mm
ALU

**Adjustable steel terrace pedestal.
100% incombustible.**

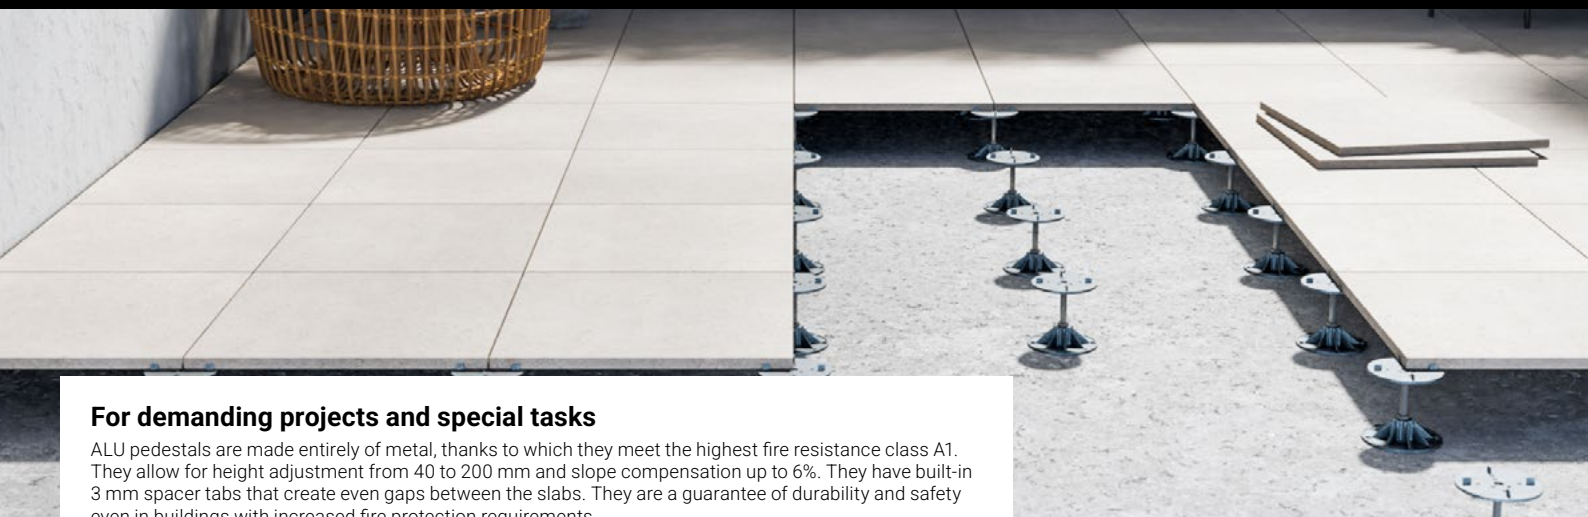

For demanding projects and special tasks

ALU pedestals are made entirely of metal, thanks to which they meet the highest fire resistance class A1. They allow for height adjustment from 40 to 200 mm and slope compensation up to 6%. They have built-in 3 mm spacer tabs that create even gaps between the slabs. They are a guarantee of durability and safety even in buildings with increased fire protection requirements.

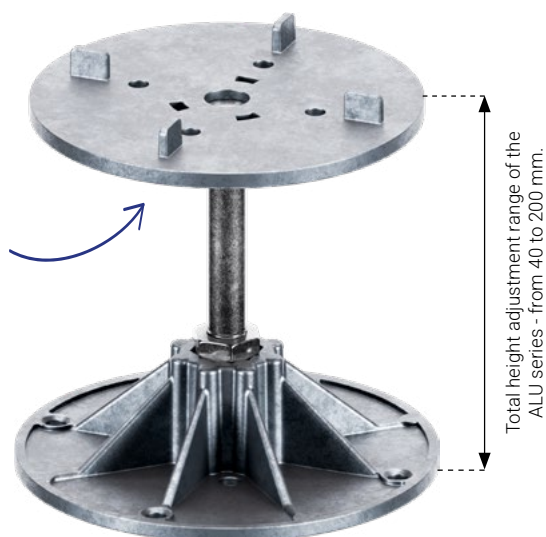

Total height adjustment range of the ALU series - from 40 to 200 mm.

ALU

ALU pedestal for tiles,
class A1 non-combustible



Total height adjustment range of the ALU series - from 40 to 200 mm.

For paving slabs



ALU features



For projects with fire protection requirements and for public facilities



Self-levelling up to 6% makes installation on uneven ground easier



Made of aluminium and galvanized steel - 100% fire resistance class A1



Smooth height adjustment in the range of 40 to 200 mm

ALU PEDESTALS

Height	Product (Short name)	Application	Join	Code	Quantity
40–50 mm	ALU-040-050-L3-(40)	for tiles	3 mm	107.010111	40 pcs
50–60 mm	ALU-050-060-L3-(40)	for tiles	3 mm	107.020111	40 pcs
60–75 mm	ALU-060-075-L3-(30)	for tiles	3 mm	107.030111	30 pcs
70–95 mm	ALU-070-095-L3-(30)	for tiles	3 mm	107.040111	30 pcs
90–115 mm	ALU-090-115-L3-(30)	for tiles	3 mm	107.050111	30 pcs
110–135 mm	ALU-110-135-L3-(30)	for tiles	3 mm	107.060111	30 pcs
130–155 mm	ALU-130-155-L3-(30)	for tiles	3 mm	107.070111	30 pcs
150–175 mm	ALU-150-175-L3-(25)	for tiles	3 mm	107.080111	25 pcs
170–200 mm	ALU-170-200-L3-(25)	for tiles	3 mm	107.090111	25 pcs

Manufacturer

SOLVER.

Solver Sp. z o.o.

Wenus 73A

80-299 Gdańsk, Poland

+48 58 585 97 37

www.solver-systems.com

sales@solver-systems.com

100% Made in EU (Poland)
Certified products