

PRODUCT CARD

Short name

STA-LE100-(250)

Full name

Self leveling head for STANDARD with maximum slope compensation 7% - height 16 mm


BASE DATA

Product group	Standard
---------------	----------

Application	• terrace tiles
-------------	-----------------

Code	102.060111
------	------------

EAN



TECHNICAL DATA

Minimum height	16 mm
----------------	-------

Maximum height	16 mm
----------------	-------

Total dimension - length	109 mm
--------------------------	--------

Total dimension - width	109 mm
-------------------------	--------


Total product dimensions - height	23 mm
-----------------------------------	-------

Head diameter (top plate) Ø 110 mm (85 cm ²)
--

Base diameter	Ø 0 mm (0 cm ²)
---------------	-----------------------------

Weight	~0.08 kg
--------	----------

Wytrzymałość na obciążenia do	1000 kg (10kN)
-------------------------------	----------------

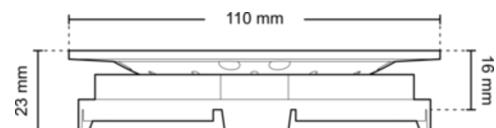



Fire resistance	E
Temperature range	od -20°C do 65°C
Color	black
Mandatory warranty	Limited 10-year residential and commercial warranty
Country of origin	Poland
Material name	Polypropylene - black regrind
Percentage of recycled material	100 %
Type of waste	• non-hazardous waste - recyclable
Project type	• exterior use

What finishing materials can be used

- concrete paver
- stone pavers
- ceramic tile

Consists of

Self-leveling head 100 mm - top , Self-leveling head 100 mm - bottom

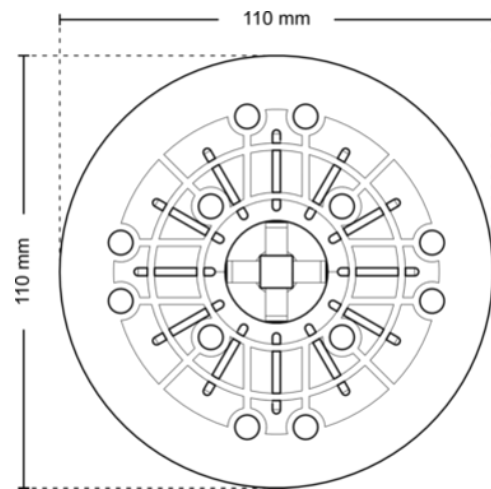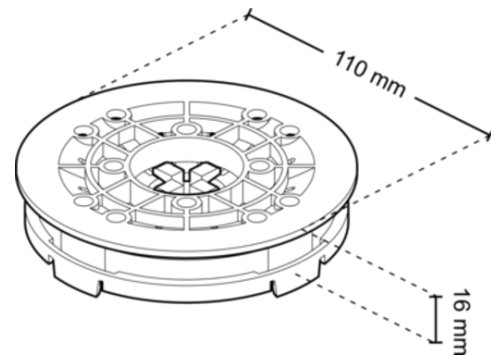

CERTIFICATES

Product certified by the Building Research Institute.
NATIONAL TECHNICAL ASSESSMENT ITB-KOT-2022-2174



LOGISTICS INFORMATION

Package	Quantity Packaging Value	Package weight	Empty package weight	Palett	Number of packages on a pallet	Number of pieces on a pallet	Pallet weight	Empty pallet weight
BOX 600x500x400	250	20 kg	1.452 kg	WOODEN PALLET 120x100x220	20	5000	427 kg	18 kg

Characteristic features

Characteristics of the STANDARD series

1. Versatile application
2. Smooth height adjustment
3. Height adjustment by rotating the nut
4. Wide range of accessories

Characteristics of the accessory:

1. The STA-LE100 self-leveling head is an additional element that clips onto the pedestal head

Application

Application of raised deck terraces:

The raised deck terrace system finds wide application in modern residential, commercial, and public utility construction. This solution is intended for creating:

1. terraces, balconies, and loggias
2. usable roofs and green roofs
3. recreational areas around buildings
4. pedestrian walkways, decks, and squares
5. spaces above technical installations requiring easy service access.

The system enables quick installation without the use of mortars and adhesives, ensuring free water drainage and ventilation under the entire terrace surface. Thanks to adjustable pedestals and/or joist construction, it allows for leveling slopes and height differences in the substrate.

Raised deck terraces are a particularly recommended solution where the following are important:

1. durability and resistance to weather conditions
2. aesthetic appearance and even surface
3. easy access to the insulation layer and installations
4. possibility of quick modernization or surface replacement

For the construction of raised deck terraces with pavers or boards on joists. Used in residential, commercial, and public utility buildings.

Used on surfaces with a slope greater than 2%.

Advantages

Advantages of raised deck terraces:

1. Height and level adjustment – possibility of precise leveling of the surface without the need for screeds
2. Effective drainage – gaps in the terrace drain water to the space under the terrace
3. Easy maintenance – access to installations and substrate without dismantling the entire structure
4. Easy maintenance – access to installations and substrate without dismantling the entire structure
5. Thermal and acoustic insulation – the air layer under the pavers improves user comfort
6. Quick installation and dismantling – possibility of reusing elements when changing the arrangement
7. Durability – resistance to weather conditions and usage loads

Advantages of the accessory:

1. It is not permanently built into the pedestal head. Allows for quick snap-on installation
2. Substrate slope compensation – automatically corrects unevenness and slopes, ensuring the terrace surface is perfectly level
3. Faster installation – eliminates the need for manual height adjustment of each pedestal or additional substrate leveling
4. Structural stability – provides better and more even support for pavers or joists, reducing the risk of shifting or cracking
5. Finishing aesthetics – guarantees a smooth, level terrace surface without visible height differences

6. Time and cost savings – less preparatory work on the substrate, no need for grinding or additional corrections

Installation recommendations

A raised deck terrace does not require permanent anchoring to the substrate. Free water drainage and ventilation must be ensured under the entire surface of the terrace. The substrate must be level, stable, and load-bearing. A slope of at least 1.5–2% towards the drainage must be provided. In the case of higher loads, densify the support grid. Level the terrace height by adjusting the pedestals. At building expansion joints, maintain a gap and seal it with flexible elements. Pedestals cannot be stacked on top of each other - meaning the base of the upper pedestal cannot be placed on the top cap of the lower pedestal. The holes in the base are only for stacking pedestals during packaging.

Adjustable pedestals are intended for the construction of external raised floors used exclusively by pedestrians. They are not designed to carry loads from moving or vibrating equipment and machinery, including service vehicles, cleaning machines, cars, or other similar equipment. Height adjustment is carried out by rotating the nut threaded onto the pedestal screw. Do not unscrew the pedestal screws beyond the permissible height range. The minimum compressive strength of the substrate in the case of insulation boards is 200 kPa.

Self-leveling head should not be used on surfaces that do not have a slope of less than 2%. When installing the head in the pedestal cap, rotate its lower part until the protruding element fits into the hole in the cap, which will block further rotation of the lower part of the head.

Tools

- Measure - Spirit level - String line or cross line laser - Pencil or construction marker - Mason's rule - Rubber mallet - Work gloves - Safety glasses - Hearing protection - Dust mask - Metal saw blade or jigsaw with metal cutting blade for trimming elements

Recommendations for use

The raised deck terrace is intended for use in accordance with its purpose – as a recreational surface. Do not point-load the pavers (e.g., by placing very heavy objects on a small area). Avoid mechanical impacts that could damage the pavers or the support structure. The terrace surface should be regularly swept, and leaves, sand, and debris that may accumulate in the joints should be removed. At least once a year, check the stability of the pavers and pedestals. After winter or heavy rainfall, check the drainage system for blockages. If looseness or damage is found – perform adjustment or replacement of the elements. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. In the case of a slippery surface, use anti-slip mats or additional protective coatings, e.g., around the pool.