

PRODUCT CARD

Short name

MAX-SC-(72)

Full name

Base slope corrector for MAX with maximum slope compensation 8%



BASE DATA

Product group	Max
Application	• terrace tiles • terrace joist
Code	104.040111
EAN	5 9 0 4 2 7 6 3 4 2 3 2 9  5 9 0 4 2 7 6 3 4 2 3 2 9



TECHNICAL DATA

Minimum height	30 mm
Maximum height	30 mm
Regulation type	stepped
Total dimension - length	250 mm
Total dimension - width	220 mm
Total product dimensions - height	28 mm
Head diameter (top plate) Ø 210 mm (0 cm ²)	
Base diameter	Ø 220 mm (351 cm ²)
Weight	~0.25 kg

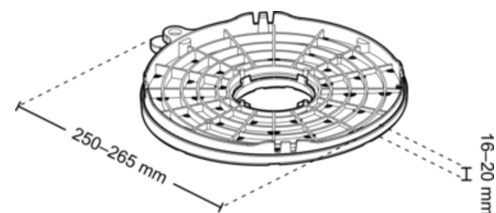

Wytrzymałość na obciążenia do	1500 kg (15kN)
Fire resistance	E
Temperature range	od -20°C do 65°C
Color	black
Mandatory warranty	Limited 10-year residential and commercial warranty
Country of origin	Poland
Material name	Polypropylene - black regrind
Percentage of recycled material	100 %
Type of waste	• non-hazardous waste - recyclable
Project type	• exterior use

What finishing materials can be used


- concrete paver
- stone pavers
- ceramic tile
- hardwood joist
- softwood joist
- aluminium joist
- WPC joist

Consists of

Slope corrector MAX down , Slope corrector MAX top

CERTIFICATES

Product certified by the Building Research Institute.
NATIONAL TECHNICAL ASSESSMENT ITB-KOT-2022-2174

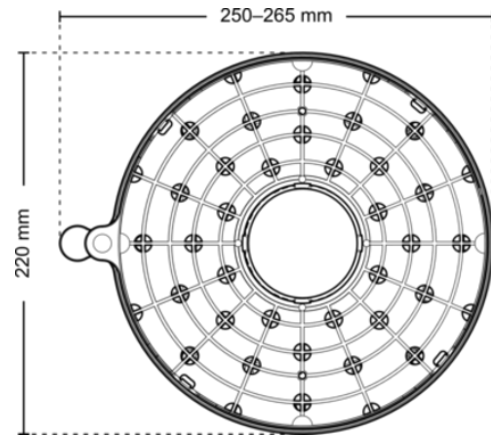

LOGISTICS INFORMATION

Package	Quantity Packaging Value	Package weight	Empty package weight	Palett	Number of packages on a pallet	Number of pieces on a pallet	Pallet weight	Empty pallet weight
BOX 600x500x400	72	19 kg	1.452 kg	WOODEN PALLET 120x100x220	20	1440	401 kg	18 kg

Characteristic features

Characteristics of the MAX series

1. Large height adjustment range
2. High load-bearing capacity
3. Suitable for commercial and public utility projects
4. Extended functionality with the largest number of accessories

Characteristics of the accessory:

1. The slope corrector consists of two rotating parts, lower and upper, which are connected by snap locks

Application

Application of raised deck terraces:

The raised deck terrace system finds wide application in modern residential, commercial, and public utility construction. This solution is intended for creating:

1. terraces, balconies, and loggias
2. usable roofs and green roofs
3. recreational areas around buildings
4. pedestrian walkways, decks, and squares
5. spaces above technical installations requiring easy service access.

The system enables quick installation without the use of mortars and adhesives, ensuring free water drainage and ventilation under the entire terrace surface. Thanks to adjustable pedestals and/or joist construction, it allows for leveling slopes and height differences in the substrate.

Raised deck terraces are a particularly recommended solution where the following are important:

1. durability and resistance to weather conditions
2. aesthetic appearance and even surface
3. easy access to the insulation layer and installations
4. possibility of quick modernization or surface replacement

For the construction of raised deck terraces with pavers or boards on joists. Used in residential, commercial, and public utility buildings as well as in specialized spaces with high usage intensity.

Use on substrates with an inclined surface.

Advantages

Advantages of raised deck terraces:

1. Height and level adjustment – possibility of precise leveling of the surface without the need for screeds
2. Effective drainage – gaps in the terrace drain water to the space under the terrace
3. Easy maintenance – access to installations and substrate without dismantling the entire structure
4. Easy maintenance – access to installations and substrate without dismantling the entire structure
5. Thermal and acoustic insulation – the air layer under the pavers improves user comfort
6. Quick installation and dismantling – possibility of reusing elements when changing the arrangement
7. Durability – resistance to weather conditions and usage loads

Advantages of the accessory:

1. Thanks to the slope corrector, the pedestal stands vertically regardless of the substrate inclination
2. Slope correction from 0 to 8% gradient
3. Manual adjustment by rotating
4. Increases the base surface area

Installation recommendations

A raised deck terrace does not require permanent anchoring to the substrate. Free water drainage and ventilation must be ensured under the entire surface of the terrace. The substrate must be level, stable, and load-bearing. A slope of at least 1.5–2% towards the drainage must be provided. In the case of higher loads, densify the support grid. Level the terrace height by adjusting the pedestals. At building expansion joints, maintain a gap and seal it with flexible elements. Pedestals cannot be stacked on top of each other - meaning the base of the upper pedestal cannot be placed on the top cap of the lower pedestal. The holes in the base are only for stacking pedestals during packaging.

Height adjustment is carried out by rotating the central screw of the pedestal. The minimum compressive strength of the substrate in the case of insulation boards is 200 kPa

Use to correct the tilt of the pedestal's vertical axis. Press-fit into the MAX pedestal base.

Tools

- Measure - Spirit level - String line or cross line laser - Pencil or construction marker - Mason's rule - Rubber mallet - Work gloves - Safety glasses - Hearing protection - Dust mask - Metal saw blade or jigsaw with metal cutting blade for trimming elements

Recommendations for use

The raised deck terrace is intended for use in accordance with its purpose – as a recreational surface. Do not point-load the pavers (e.g., by placing very heavy objects on a small area). Avoid mechanical impacts that could damage the pavers or the support structure. The terrace surface should be regularly swept, and leaves, sand, and debris that may accumulate in the joints should be removed. At least once a year, check the stability of the pavers and pedestals. After winter or heavy rainfall, check the drainage system for blockages. If looseness or damage is found – perform adjustment or replacement of the elements. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. If access to the space under the pavers is required (e.g., for installations, drains), they should be carefully lifted using appropriate lifters or lifting tools. In the case of a slippery surface, use anti-slip mats or additional protective coatings, e.g., around the pool.